

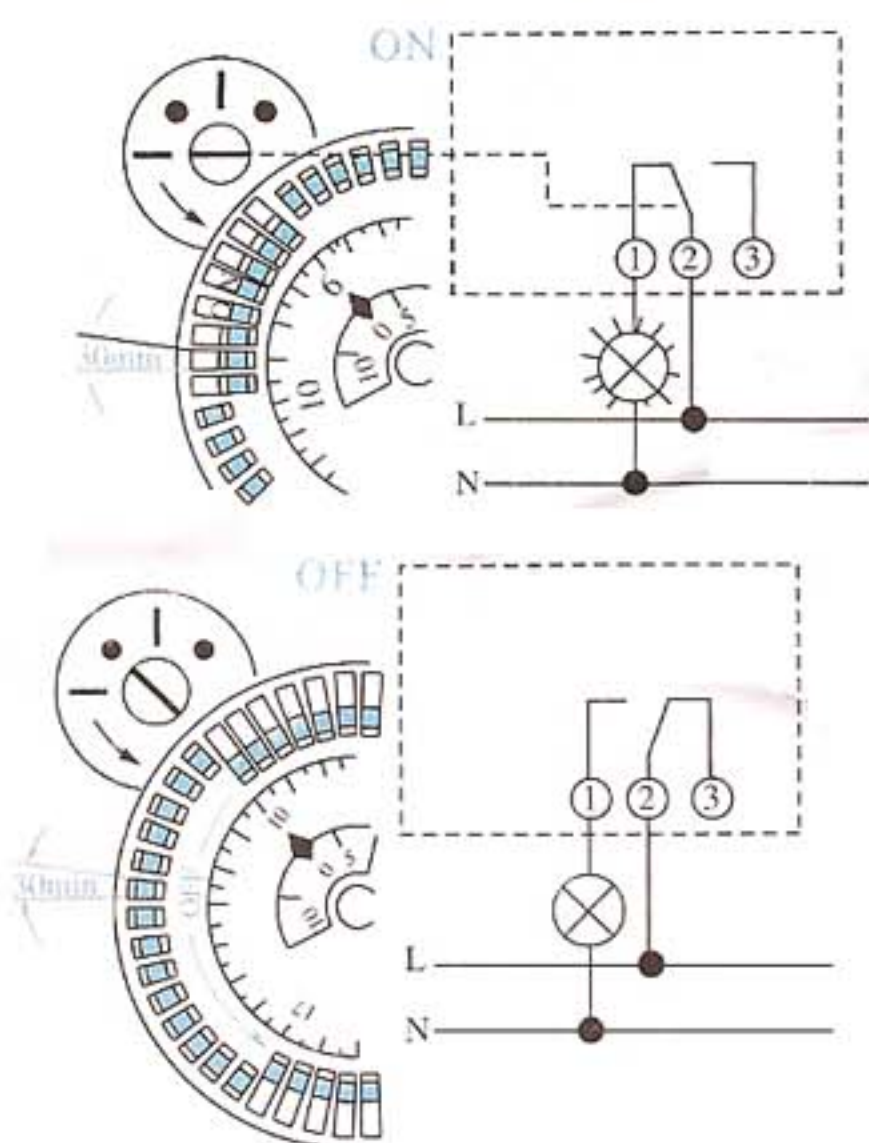


24 h Programm

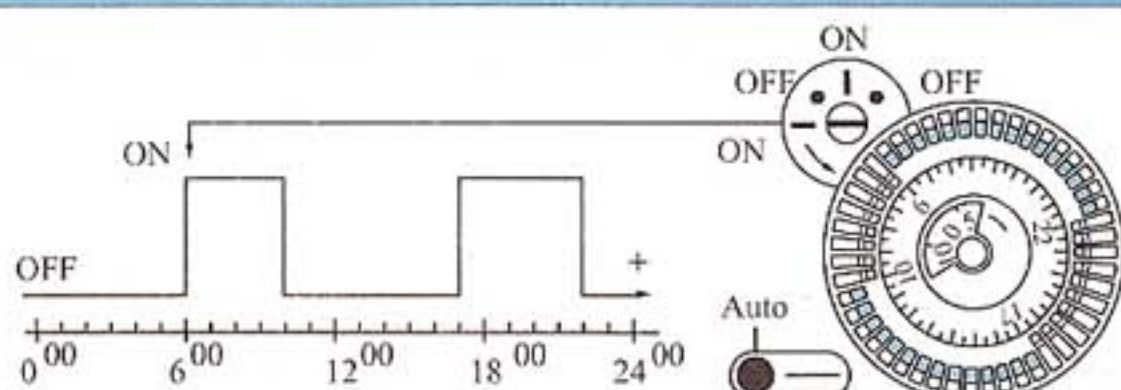


manual

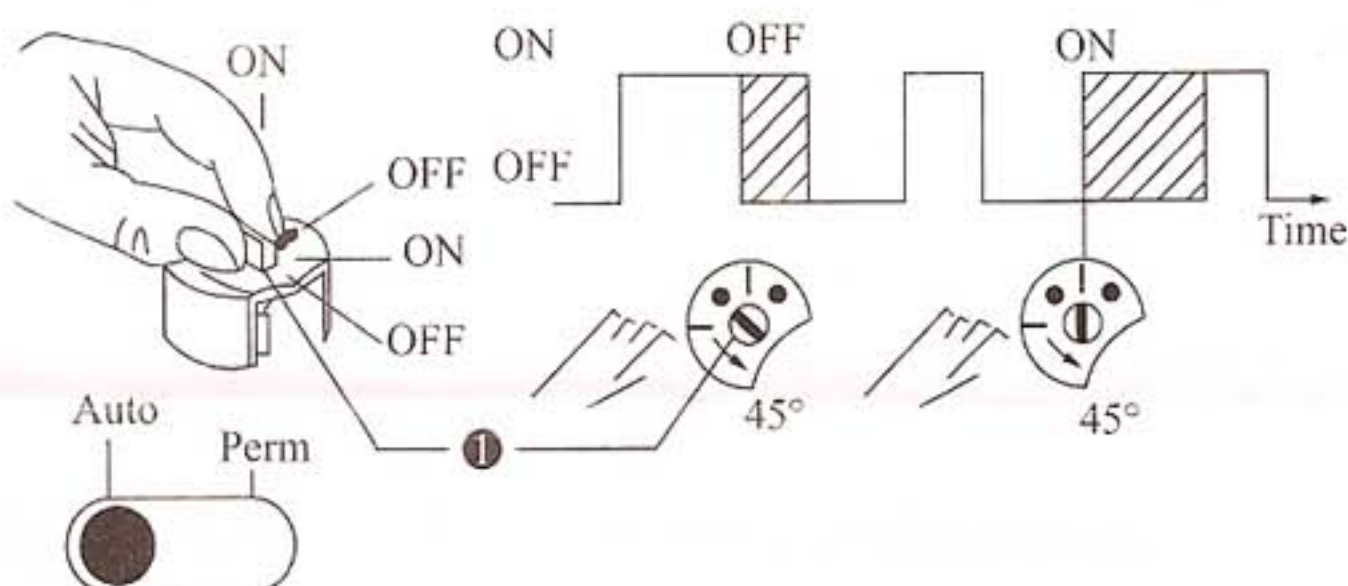

(3) Manual Control ON/OFF(Override Control)

Turn the control axis ① in direction of arrow by one notch; ON= Φ - / \ominus - or OFF = \S / \emptyset . The manual control is automatically annulled by the following counteracting command of the automatic program sequence.

permanent ON/OFF

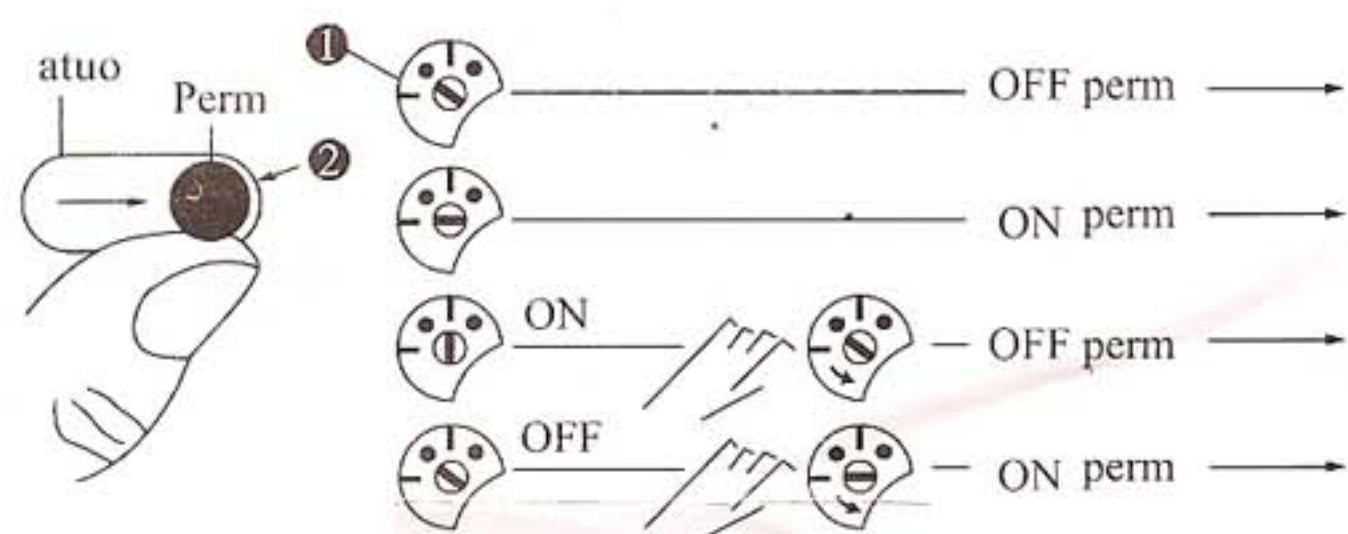

(4) Permanent Control ON/OFF

Set the hand lever ② to >> Perm <<= permanent control ; turning the control axis ① in direction of arrow, the required, permanent control ON or OFF can now be adjusted. Turning the hand lever to >> Auto <<= Automatic Control, the permanent control is terminated, The actual switch position is maintained until the next counteracting command of the automatic program sequence is triggered. An immediate correction can be carried out by means of the manual control(override control).

EMV/CEN/EMC/ETY

(5) The time switches are in accordance with the European directives 73/23/EEC. (Low- Voltage Directive) and 89/336/EEC (EMC - Directive). If the time switches are used together with other devices in an installation, take care that the complete installation does not cause a radio interference.